


- a. Remove the center screw (A, **Figure 12**) and both side screws.
- b. Unhook the headlight electrical wires from the clips (B, **Figure 12**).
- c. Remove the 2 side screws (C, **Figure 12**).
- d. Remove the grille (D, **Figure 12**) and remove it from the front fender assembly.

11. Install by reversing these removal steps. Tighten all bolts, nuts and screws securely. Do not over-tighten as the plastic fender and related components may fracture.

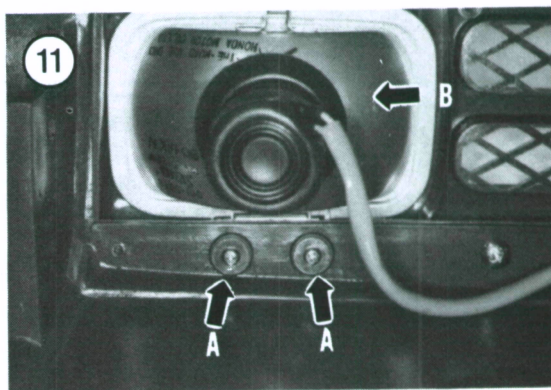


## REAR LUGGAGE CARRIER

### Removal/Installation

Refer to **Figure 1** for this procedure.

1. Remove the seat.
2. Remove the side bolts (**Figure 13**) and the top bolt (**Figure 14**) on each side securing the rear luggage carrier to the frame.
3. Left the rear luggage carrier straight up and off the rear fender and remove it.
4. Install by reversing these removal steps. Tighten all bolts securely. Do not overtighten as the plastic fender may fracture.


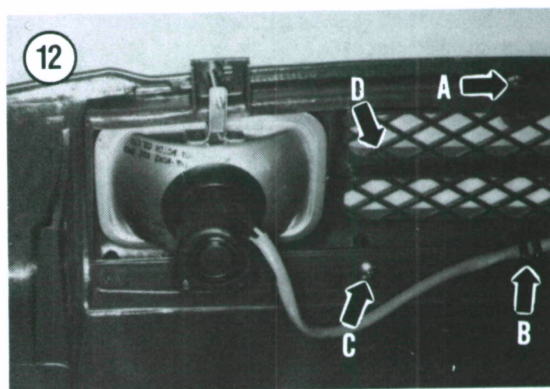


## REAR FENDER

### Removal/Installation


Refer to **Figure 15** for this procedure.

1. Remove the rear luggage carrier as described in this chapter.
2. Remove the battery as described in Chapter Three.
3. Disconnect the electrical connector from the tail-light/brake light assembly.
4. Open the tool box cover.
5. Remove the bolts (**Figure 16**) securing the tool box and remove the tool box assembly.
6. Remove the upper bolts (A, **Figure 17**) securing the rear fender to the frame.
7. On 1989-on models, remove the bolts (A, **Figure 18**) and plate securing the front mudguard to the bracket (B, **Figure 18**). Unhook the bracket from the foot peg.
8. Under the rear fender, remove the bolts (A, **Figure 19**) securing the rear fender mounting bracket to the

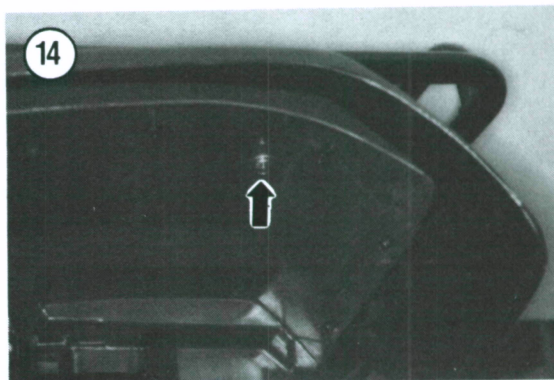
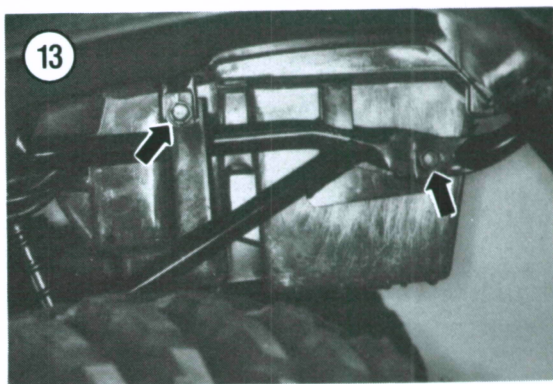


15

REAR FENDER

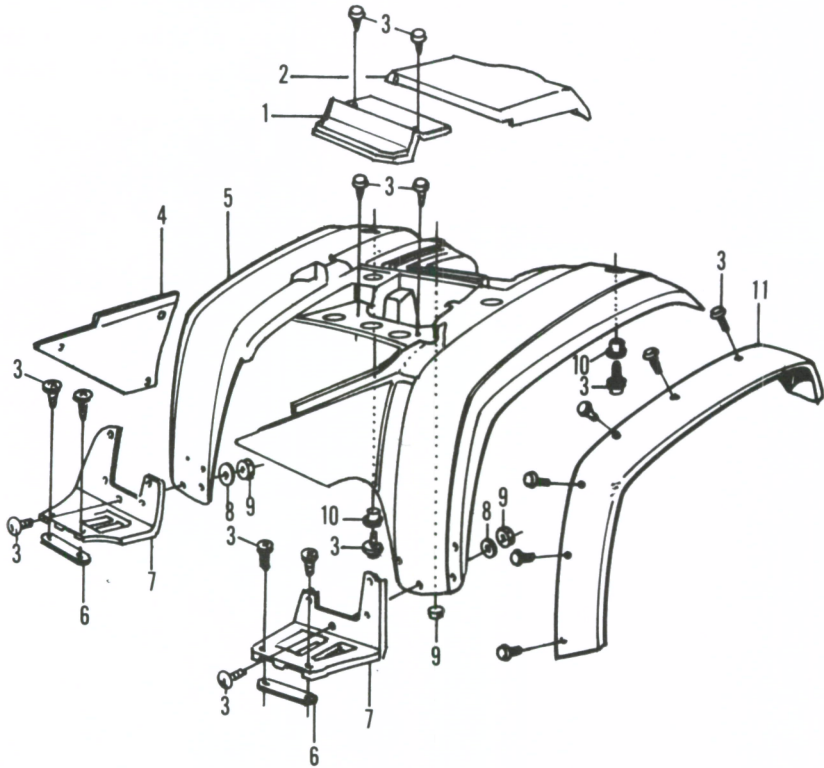

- |                          |                                    |                     |
|--------------------------|------------------------------------|---------------------|
| 1. Battery box cover     | 5. Rear fender assembly            |                     |
| 2. Tool box cover        | 6. Bracket                         |                     |
| 3. Bolt                  | 7. Front mudguard (1989 and later) | 9. Nut              |
| 4. Right-hand side cover | 8. Washer                          | 10. Collar          |
|                          |                                    | 11. Mudguard - side |

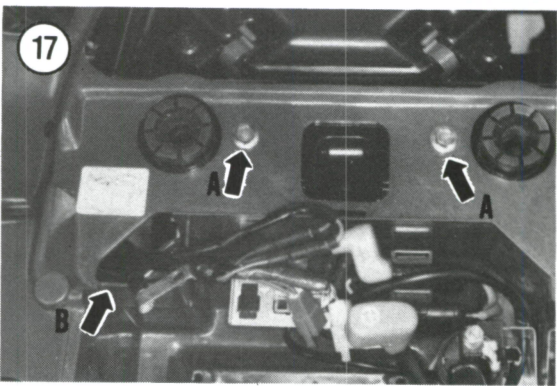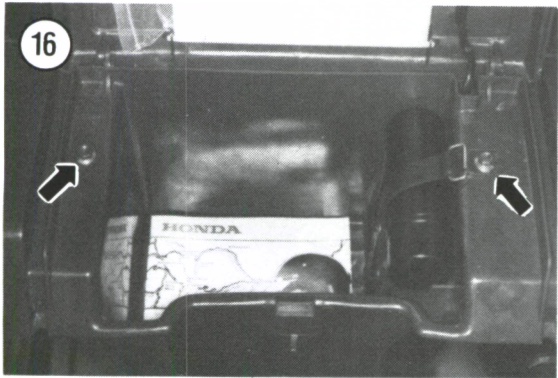





frame. Leave the mounting bracket (B, **Figure 19**) attached to the rear fender.

9. Partially pull the rear fender up at the rear and feed all of the electrical cables through the openings (B, **Figure 17**) on the left-hand side in the fender.

10. Remove the rear fender from the frame.

11. Install by reversing these removal steps while noting the following:

- a. Make sure all electrical cables are routed correctly so they will not be pinched between the top of the left-hand frame rail and the bottom of the fender.
- b. Tighten all bolts and nuts securely. Do not overtighten as the plastic fender may fracture.

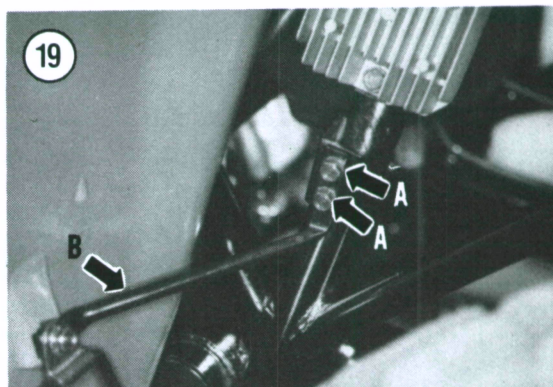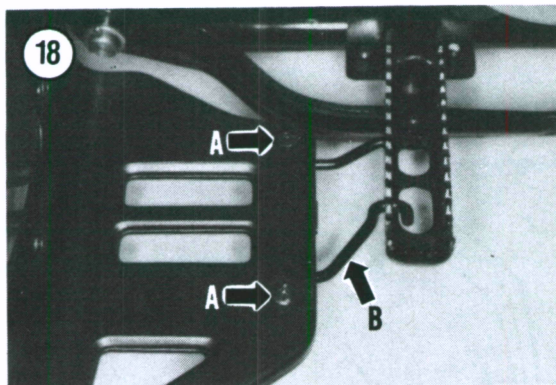

Copyright of Honda TRX300/FOURTRAX 300 & TRX300FW/FOURTRAX 300 4x4, 1988-2000 is the property of Penton Media, Inc. ("Clymer") and its content may not be copied or emailed to multiple sites or posted to a listserv without the copyright holder's express written permission. However, users may print, download, or email articles for individual use.